

Dashboard Center Middle Trim Removal and Installation

Removal/Installation

1. Both Dashboard Side Lid - Remove



2. Driver's Dashboard Lower Cover - Remove

3. Passenger's Dashboard Trim Panel - Remove

4. Dashboard Center Panel - Remove

5. Dashboard Center Middle Trim - Remove

Fastener Locations

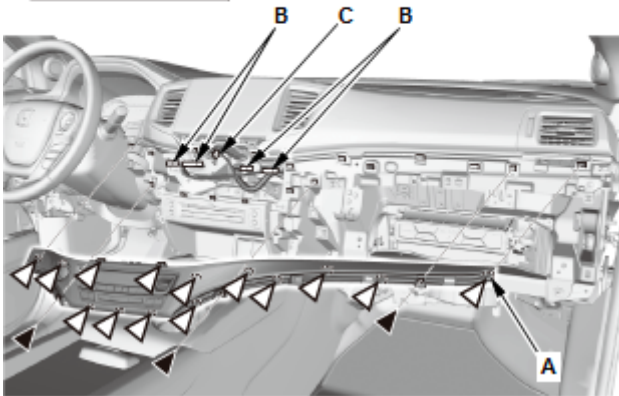

1. Remove the screws.
2. Remove the dashboard center middle trim (A).
3. Disconnect the connectors (B). (for some models)
4. Remove the harness clip (C).

6. All Removed Parts - Install

1. Install the parts in the reverse order of removal.